DT-520

- Five rib design provides cleaning and water evacuation
- Designed to optimize durability performance in high load regional operations

Optimized Handling

Multiple Retreads

Off Road Application

SIZE	PLY	LOAD RANGE	LOAD/SPEED INDEX	MAX. LOAD		MAX. PRESSURE PSI	MEASURE RIM WIDTH (inch)	OVERALL DIAMETER (inch)	SECTION WIDTH (inch)	TREAD WIDTH (32nd)	TREAD DEPTH (32nd)
				SINGLE	DUAL						
385/65R22.5	20	L	160K	9920	9920	130	11.75	42.1	15.0	11.42	21.4

RECOMMENDED WHEEL POSITION

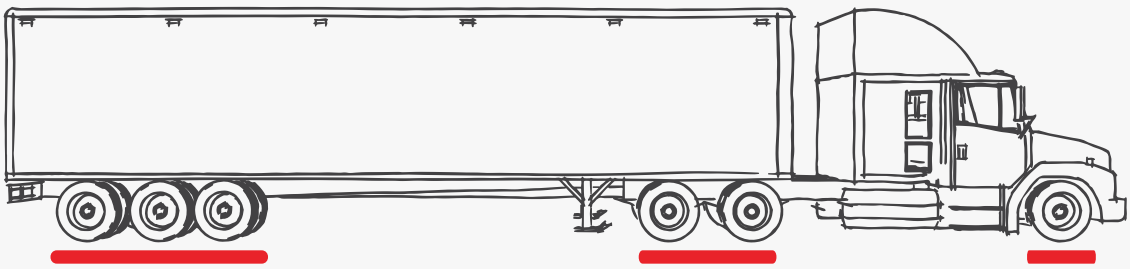

DURA·MÁS