DT-578

- Solid rib design combined with multiple sipes
- Four wide circumferential grooves
- Reinforced shoulder design
- Excellent heat dissipation and improved wear with lower rolling resistance
- Compound provides resistance to abrasion

Regional Application

Enhanced Mileage

Optimized Handling

Multiple Retreads

SIZE	PLY	LOAD RANGE	LOAD/SPEED INDEX	MAX. LOAD		MAX. PRESSURE PSI	MEASURE RIM WIDTH (inch)	OVERALL DIAMETER (inch)	SECTION WIDTH (inch)	TREAD WIDTH (32nd)	TREAD DEPTH (32nd)
				SINGLE	DUAL						
295/80R22.5	18	J	152/149M	7830	7160	130	9	40.8	12.1	9.6	18.9
315/80R22.5	20	L	156/152L	8820	7830	125	9	42.1	12.2	9.45	18.3

RECOMMENDED WHEEL POSITION

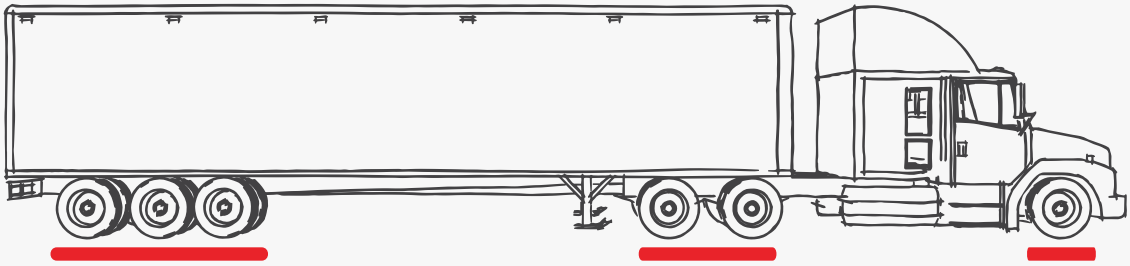

DURA·MÁS