DT-601

- Specialized tread compound
- Mixed pattern design
- Extra wide footprint with squared shoulder
- Reinforced carcass and bead
- Outstanding resistance to puncture and tearing
- Enhanced stability and resistance to abrasion

Off Road Application | Enhanced Mileage | Chip Resistant | Extra Traction | Multiple Retreads

SIZE	PLY	LOAD RANGE	LOAD/SPEED INDEX	MAX. LOAD		MAX. PRESSURE PSI	MEASURE RIM WIDTH (inch)	OVERALL DIAMETER (inch)	SECTION WIDTH (inch)	TREAD WIDTH (32nd)	TREAD DEPTH (32nd)
				SINGLE	DUAL						
11R22.5	16	H	148/145M	6940	6395	123	8.25	41.5	11.0	8.43	19.5
11R24.5	16	H	149/146L	7160	6610	120	8.25	43.4	11.0	8.43	19.5

RECOMMENDED WHEEL POSITION

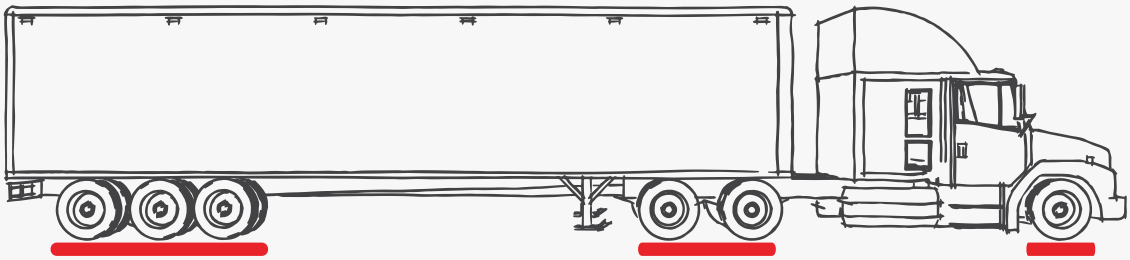

DURA·MÁS