DT-708

- Block pattern design with multiple sipes
- Reinforced solid shoulder design
- Four wide circumferential grooves
- Outstanding resistance to abrasion
- Enhanced water evacuation, even pressure distribution and heat dissipation

SIZE	PLY	LOAD RANGE	LOAD/SPEED INDEX	MAX. LOAD		MAX. PRESSURE PSI	MEASURE RIM WIDTH (inch)	OVERALL DIAMETER (inch)	SECTION WIDTH (inch)	TREAD WIDTH (32nd)	TREAD DEPTH (32nd)
				SINGLE	DUAL						
11R22.5	16	H	146/143L	6610	6005	120	8.25	41.9	11.0	8.74	27.1
11R24.5	16	H	149/146L	7160	6610	120	8.25	43.9	11.0	8.74	27.1
295/75R22.5	16	H	146/143L	6610	6005	120	9.00	40.4	11.7	8.74	27.7

RECOMMENDED WHEEL POSITION

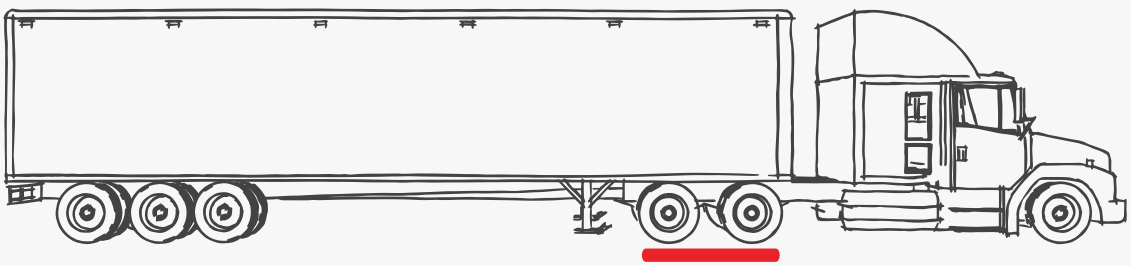

DURA·MÁS